



Opto Plus LED Corp.
0.50" Case Mold Type LED Display
OPD-AS5010UPG-GW
OPD-AS5011UPG-GW

● **EDIT HISTORY**

Version A : Mar. 20, 2015

Preliminary Spec.

Manufacture	Examination	Approving



Opto Plus LED Corp.
0.50" Case Mold Type LED Display
OPD-AS5010UPG-GW
OPD-AS5011UPG-GW

● **FEATURES**

- 0.50 inch (12.70 mm) Digit Height.
- Low current operation.
- Case mold type.
- Gray face, White segment.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The OPD-AS5010UPG-GW & OPD-AS5011UPG-GW is a 0.50 inch (12.70 mm) height alphanumeric display.

This device utilizes Pure Green LED chip which are made from InGaN on a transparent GaN substrate.

The display has Gray face, White segment.

● **DEVICE**

PART NO Pure Green	DESCRIPTION
OPD-AS5010UPG-GW	Common Anode
OPD-AS5011UPG-GW	Common Cathode

RoHS Compliance



Pb free.






Opto Plus LED Corp.

0.50" Case Mold Type LED Display

OPD-AS5010UPG-GW


OPD-AS5011UPG-GW

MECHANICAL DIMENSIONS

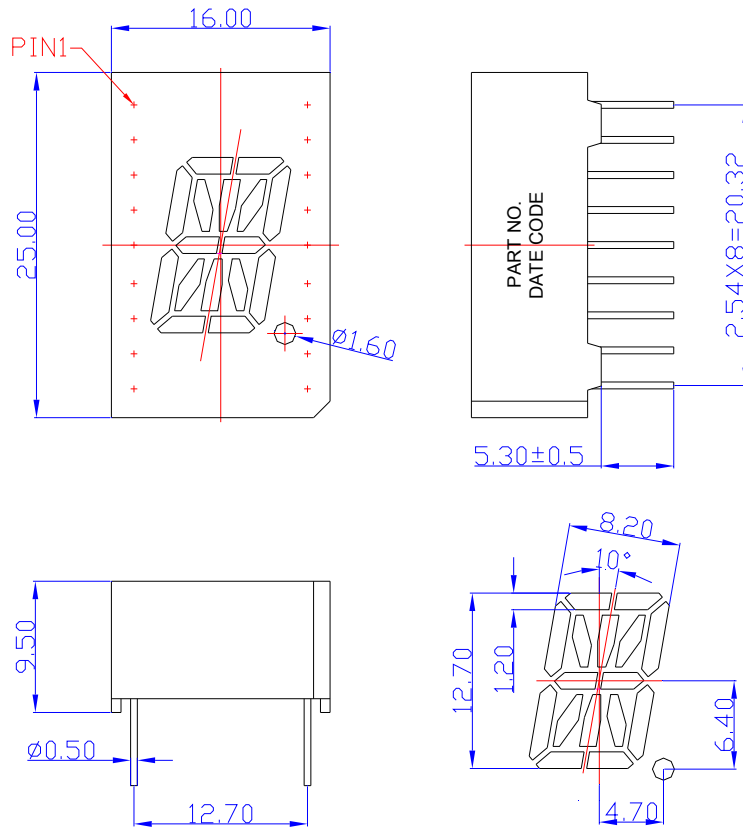

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

TYPICAL INTERNAL EQUIVALENT CIRCUIT

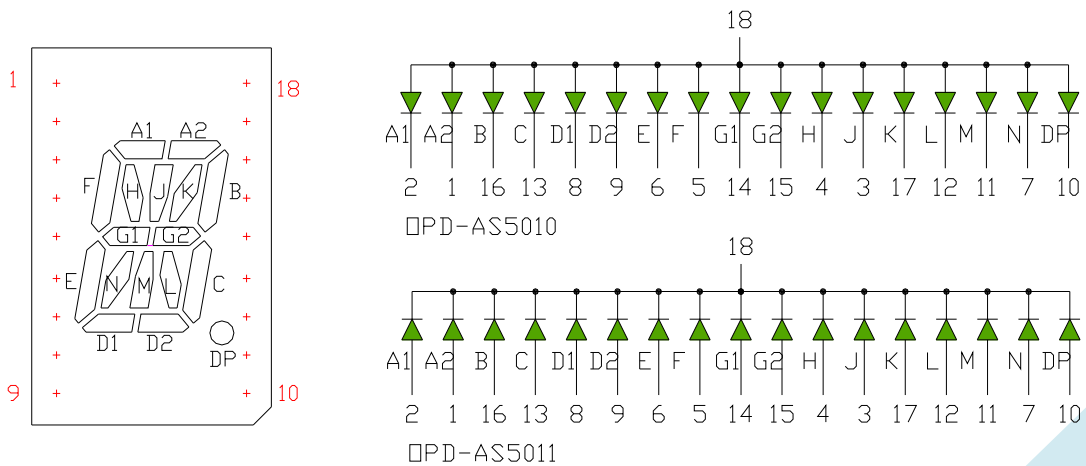



Opto Plus LED Corp.
0.50" Case Mold Type LED Display
OPD-AS5010UPG-GW
OPD-AS5011UPG-GW

● **PG: PURE GREEN (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Pure Green	Unit
Power dissipation per dice	P _{AD}	120	mW
Derating liner from 25°C per dice	-	0.4	mA / °C
Continuous forward current per dice	I _{AF}	30	mA
Peak current per dice (duty cycle 1/10, 1kHz)	I _{PF}	120	mA
Reverse voltage per dice	V _R	5	V
Operating temperature	T _{OPR}	-25 to +85	°C
Storage temperature	T _{STG}	-25 to +85	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage	V _F	I _F =20mA	2.8	3.2	4.0	V
Reverse current	I _R	V _R =8V	-	-	10	μA
Dominant wavelength	λ _D	I _F =20mA	500	525	535	nm
Luminous intensity	I _v	I _F =20mA	160	200	350	mcd
Spectral radiation bandwidth	Δλ	I _F =20mA	-	30	-	nm



Opto Plus LED Corp.

0.50" Case Mold Type LED Display

OPD-AS5010UPG-GW

OPD-AS5011UPG-GW

● PG: PURE GREEN (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves (25 °C Free Air Temperature Unless Otherwise Specified)

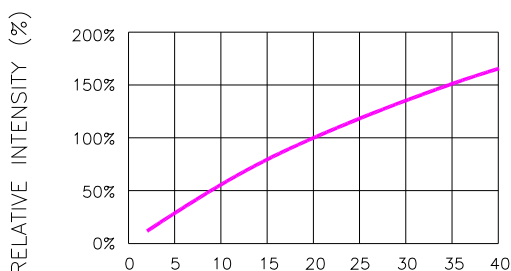


Fig.1 RELATIVE INTENSITY VS. FORWARD CURRENT

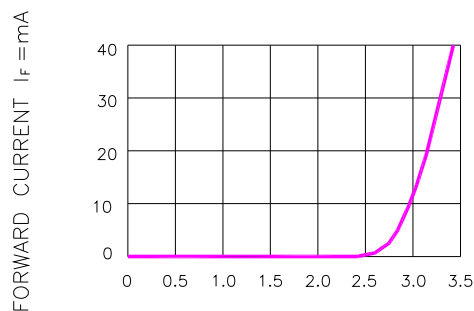


Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

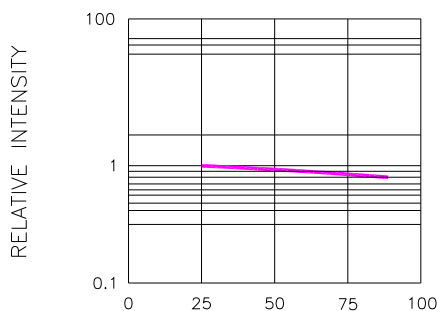


Fig.3 RELATIVE INTENSITY VS. LEAD TEMPERATURE
(PULSED 20 mA; 300us PULSE, 10ms PERIOD)

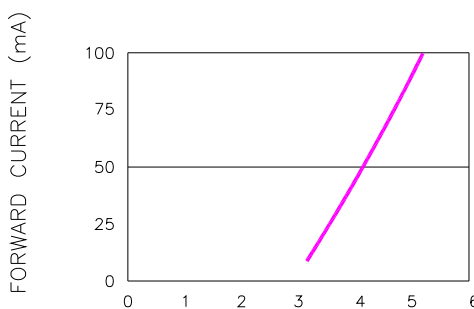


Fig.4 PEAK FORWARD VOLTAGE VS. FORWARD CURRENT
(100us TEST PULSE, 1% DUTY CYCLE)

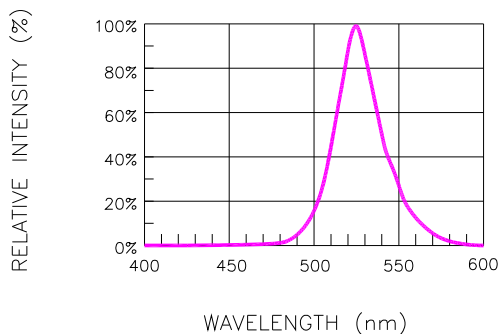


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH


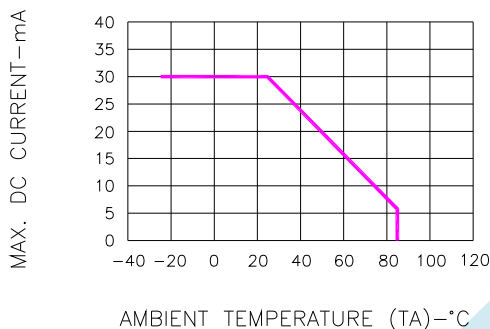


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE



Opto Plus LED Corp.
0.50" Case Mold Type LED Display
OPD-AS5010UPG-GW
OPD-AS5011UPG-GW

● **RECOMMEND SOLDERING PROFILE**

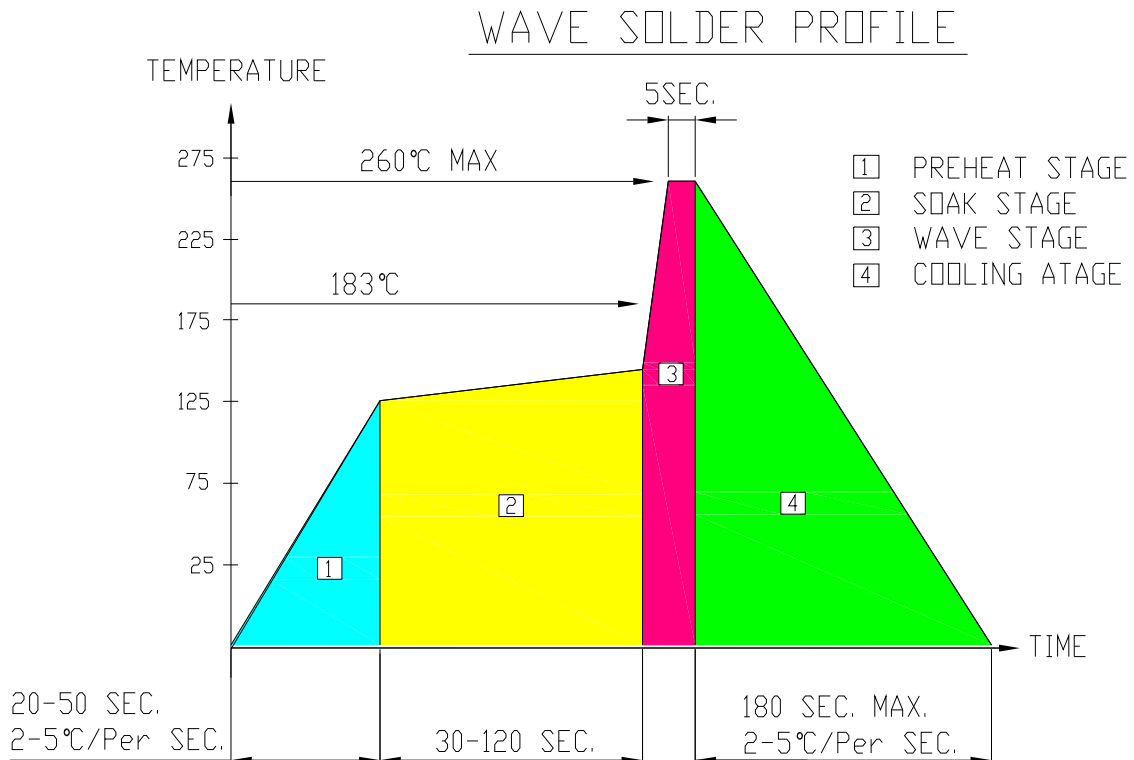

● **SOLDERING IRON**

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**



Customer must finish rework within ≤ 4 sec under 245°C.



Opto Plus LED Corp.
0.50" Case Mold Type LED Display
OPD-AS5010UPG-GW
OPD-AS5011UPG-GW


● **PACKAGE DIMENSIONS**

220 PCS (22 X 10) / 1 ANTISTATIC E. PE. FOAM SHEET

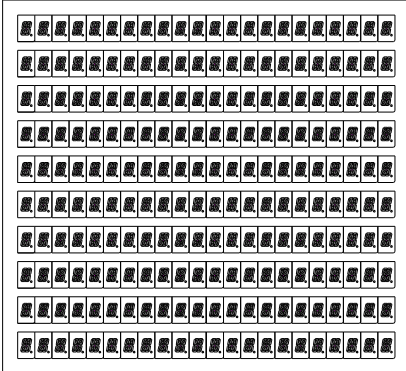


ESD BAG SIZE : 650 x 550 mm

5 ANTISTATIC E. PE. FOAM SHEET & 1 CARDBOARD / PINK ESD BAG
1100 PCS /1Inner Carton

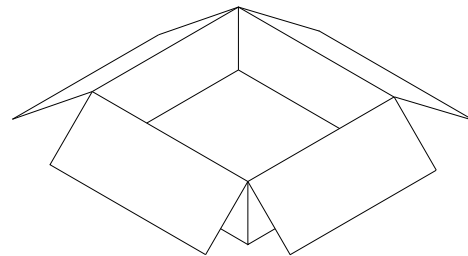

INNER BOX SIZE : 394 x 370 x 138 mm

2200 PCS / 2 Inner Carton / 1 Outer Carton

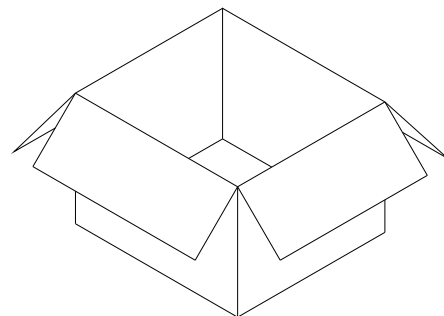

OUTER BOX SIZE : 430 x 390 x 300 mm