



**Opto Plus LED Corp.**  
**0.28" Case Mold Type LED Display**  
**OPD-Q2810LA-GW**  
**OPD-Q2811LA-GW**

● **EDIT HISTORY**

Version A : Sep. 10, 2015

Preliminary Spec.

Manufacture	Examination	Approving



**Opto Plus LED Corp.**  
**0.28" Case Mold Type LED Display**  
**OPD-Q2810LA-GW**  
**OPD-Q2811LA-GW**

● **FEATURES**

- 0.28 inch (7.0 mm) Digit Height.
- Low current operation.
- Case mold type.
- Gray face, White segment.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The OPD-Q2810LA-GW & OPD-Q2811LA-GW is a 0.28 inch (7.0 mm) height quadruple digits display.

This device utilizes Super Bright Amber LED chip which are made from AlGaInP on a transparent GaAs, substrate. The display has Gray face, White segment.

● **DEVICE**

<b>PART NO</b> <b>Super Bright Amber</b>	<b>DESCRIPTION</b>
OPD-Q2810LA-GW	Common Anode
OPD-Q2811LA-GW	Common Cathode

**RoHS Compliance**



**Pb free.**






# Opto Plus LED Corp.

## 0.28" Case Mold Type LED Display

### OPD-Q2810LA-GW


### OPD-Q2811LA-GW

#### MECHANICAL DIMENSIONS

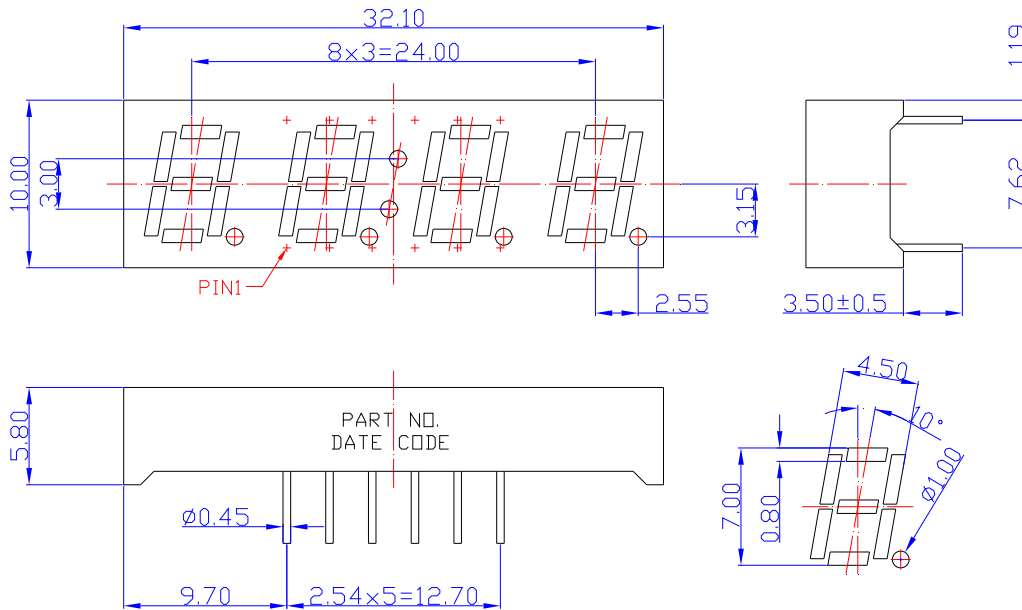

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

#### TYPICAL INTERNAL EQUIVALENT CIRCUIT

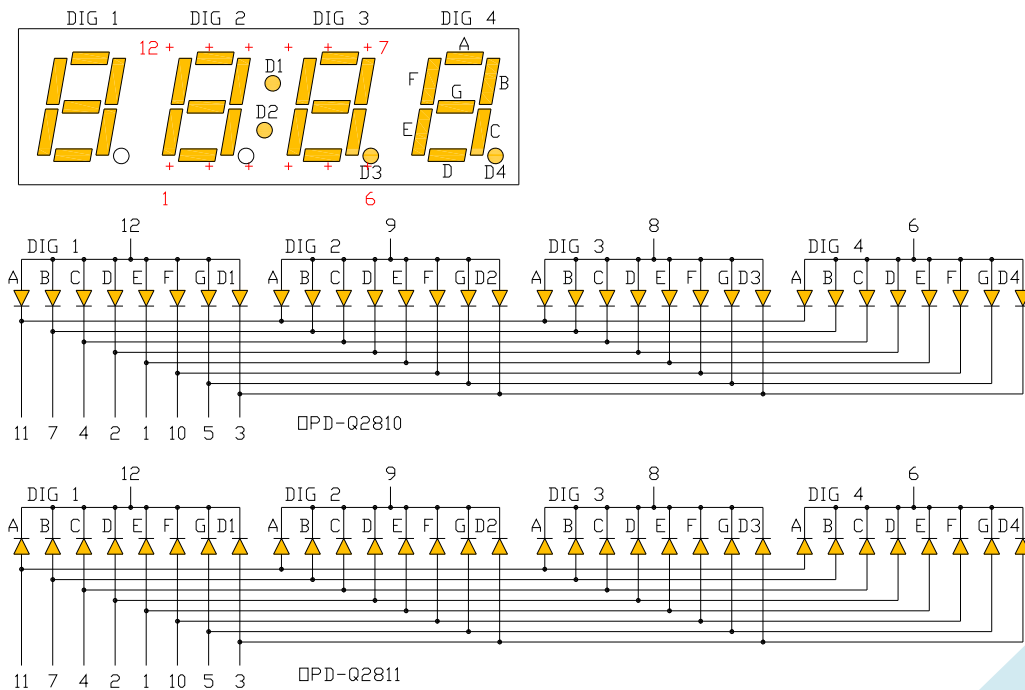



**Opto Plus LED Corp.**  
**0.28" Case Mold Type LED Display**  
**OPD-Q2810LA-GW**  
**OPD-Q2811LA-GW**

● **LA: SUPER BRIGHT AMBER (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Super Bright Amber	Unit
Power dissipation per dice	P <sub>AD</sub>	70	mW
Derating liner from 25°C per dice	-	0.33	mA / °C
Continuous forward current per dice	I <sub>AF</sub>	25	mA
Peak current per dice (duty cycle 1/10, 1kHz)	I <sub>PF</sub>	90	mA
Reverse voltage per dice	V <sub>R</sub>	5	V
Operating temperature	T <sub>OPR</sub>	-25 to +85	°C
Storage temperature	T <sub>STG</sub>	-25 to +85	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	-	2.0	2.6	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	μA
Peak wavelength	λ <sub>P</sub>	I <sub>F</sub> =20mA	-	610	-	nm
Dominant wavelength	λ <sub>D</sub>	I <sub>F</sub> =20mA	-	606	-	nm
Luminous intensity	I <sub>v</sub>	I <sub>F</sub> =20mA	-	40	-	mcd
Spectral radiation bandwidth	Δλ	I <sub>F</sub> =20mA	-	35	-	nm



# Opto Plus LED Corp.

## 0.28" Case Mold Type LED Display

### OPD-Q2810LA-GW

### OPD-Q2811LA-GW

#### ● LA: SUPER BRIGHT AMBER (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

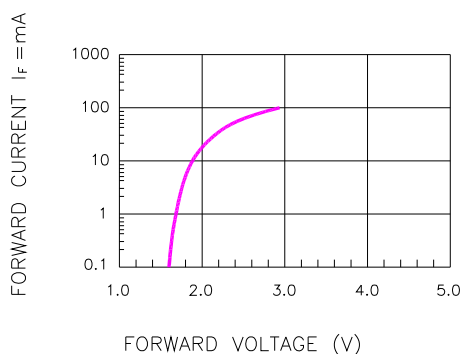


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

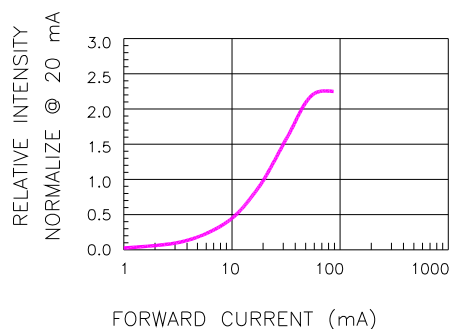


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

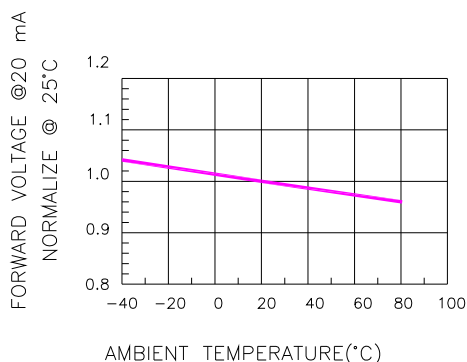


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

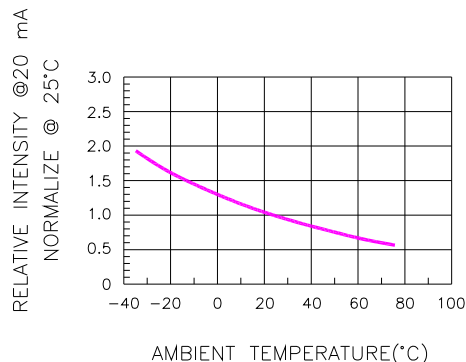


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

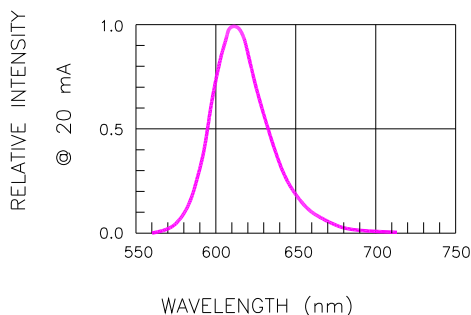


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH


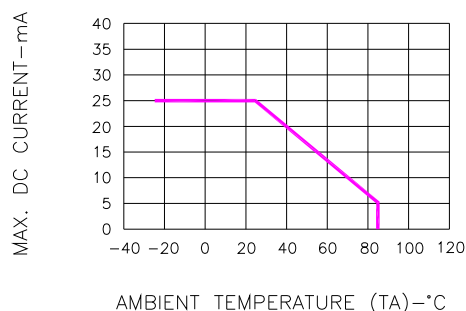


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE



**Opto Plus LED Corp.**  
**0.28" Case Mold Type LED Display**  
**OPD-Q2810LA-GW**  
**OPD-Q2811LA-GW**

● **RECOMMEND SOLDERING PROFILE**

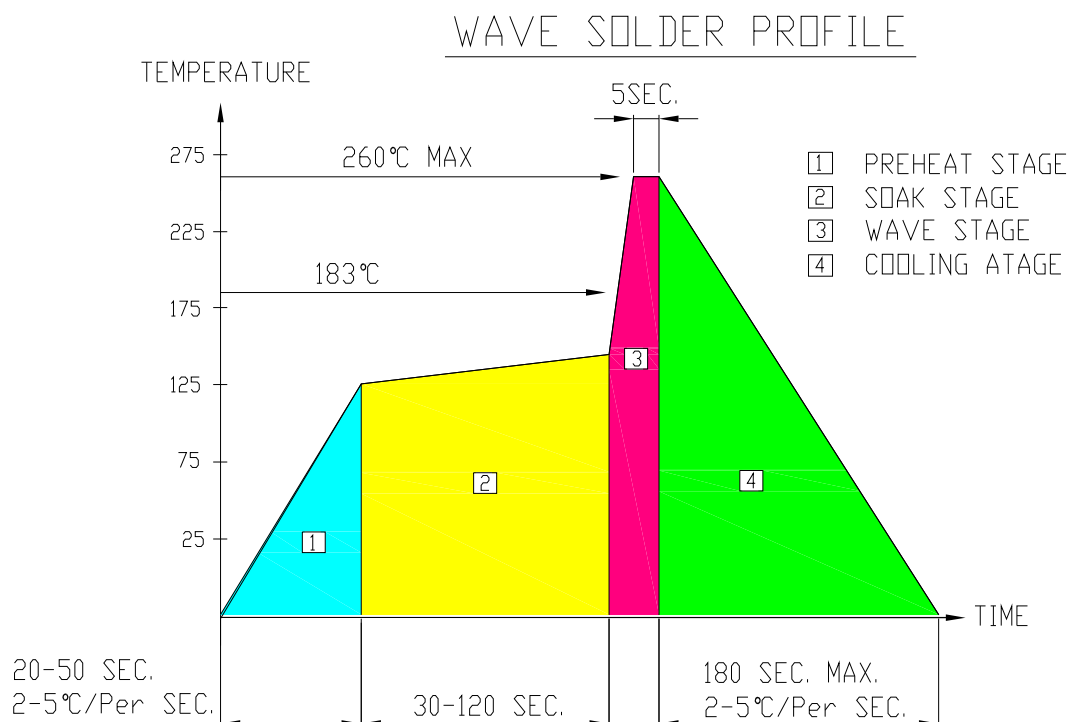

● **Note:**

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass

● **SOLDERING IRON**

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C→1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

Customer must finish rework within  $\leq 3$  sec under 350°C.  
The head of soldering iron cannot touch copper foil.



# Opto Plus LED Corp.



## 0.28" Case Mold Type LED Display

### OPD-Q2810LA-GW

### OPD-Q2811LA-GW


#### ● PACKAGE DIMENSIONS

209PCS(11X19) / 1 White Polyform & 1 CARDBOARD

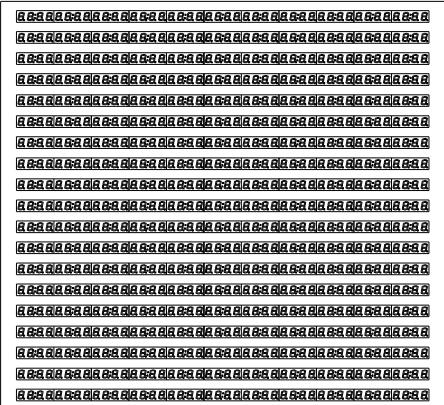


BAG SIZE : 450X410X560

1254 PCS / 6 White Polyform / 1 BAG

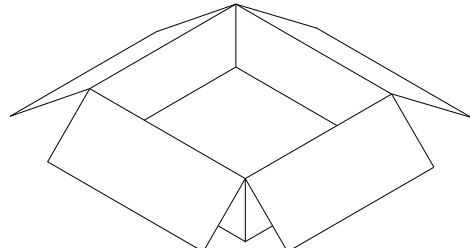

INNER BOX SIZE : 394 x 370 x 138 mm

1254 PCS / 1 INNER CARTON  
2508 PCS / 2 INNER CARTONS / 1 OUTER CARTON

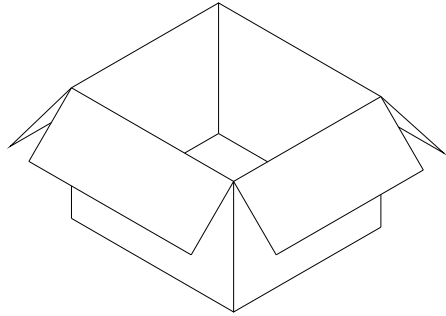

#### ● Note:

##### LED DISPLAY STANDARD STORAGED CONDITION

OUTER BOX SIZE : 430 x 390 x 300 mm

Product in the original packaging material state is the recommended storage conditions.

TERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

If the storage conditions do not meet specification standards, the component pins may become oxidized requiring re-plating and re-sorting before use. Suggest customers consume LEDs as soon as possible, and avoid long-term storage of large inventories.