



Opto Plus LED Corp.
0.4" SMD Type LED Display
OPS-D4013LA-GW
OPS-D4014LA-GW

● **EDIT HISTORY**

Version A: Nov. 26, 2015

Preliminary spec.

| Manufacture | Examination | Approving |
|-------------|-------------|-----------|
| | | |



Opto Plus LED Corp.
0.4” SMD Type LED Display
OPS-D4013LA-GW
OPS-D4014LA-GW

● **FEATURES**

- 0.4 inch (10.16 mm) Digit Height.
- SMD type.
- Low current operation.
- Gray face, White segment.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The OPS-D4013LA-GW & OPS-D4014LA-GW are 0.4 inch (10.16 mm) height Dual digits 7-segment display.

This device utilizes Super Bright Amber LED chip which are made from AlGaInP On a transparent GaAs, substrate.

The display has Gray face, White segment.

● **DEVICE**


| PART NO | DESCRIPTION |
|----------------|----------------|
| OPS-D4014LA-GW | Common Anode |
| OPS-D4013LA-GW | Common Cathode |

RoHS Compliance




Pb free.



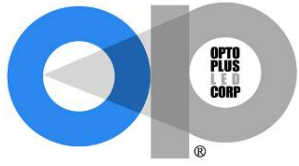


Opto Plus LED Corp.
0.4" SMD Type LED Display
OPS-D4013LA-GW
OPS-D4014LA-GW

● **MECHANICAL DIMENSIONS**

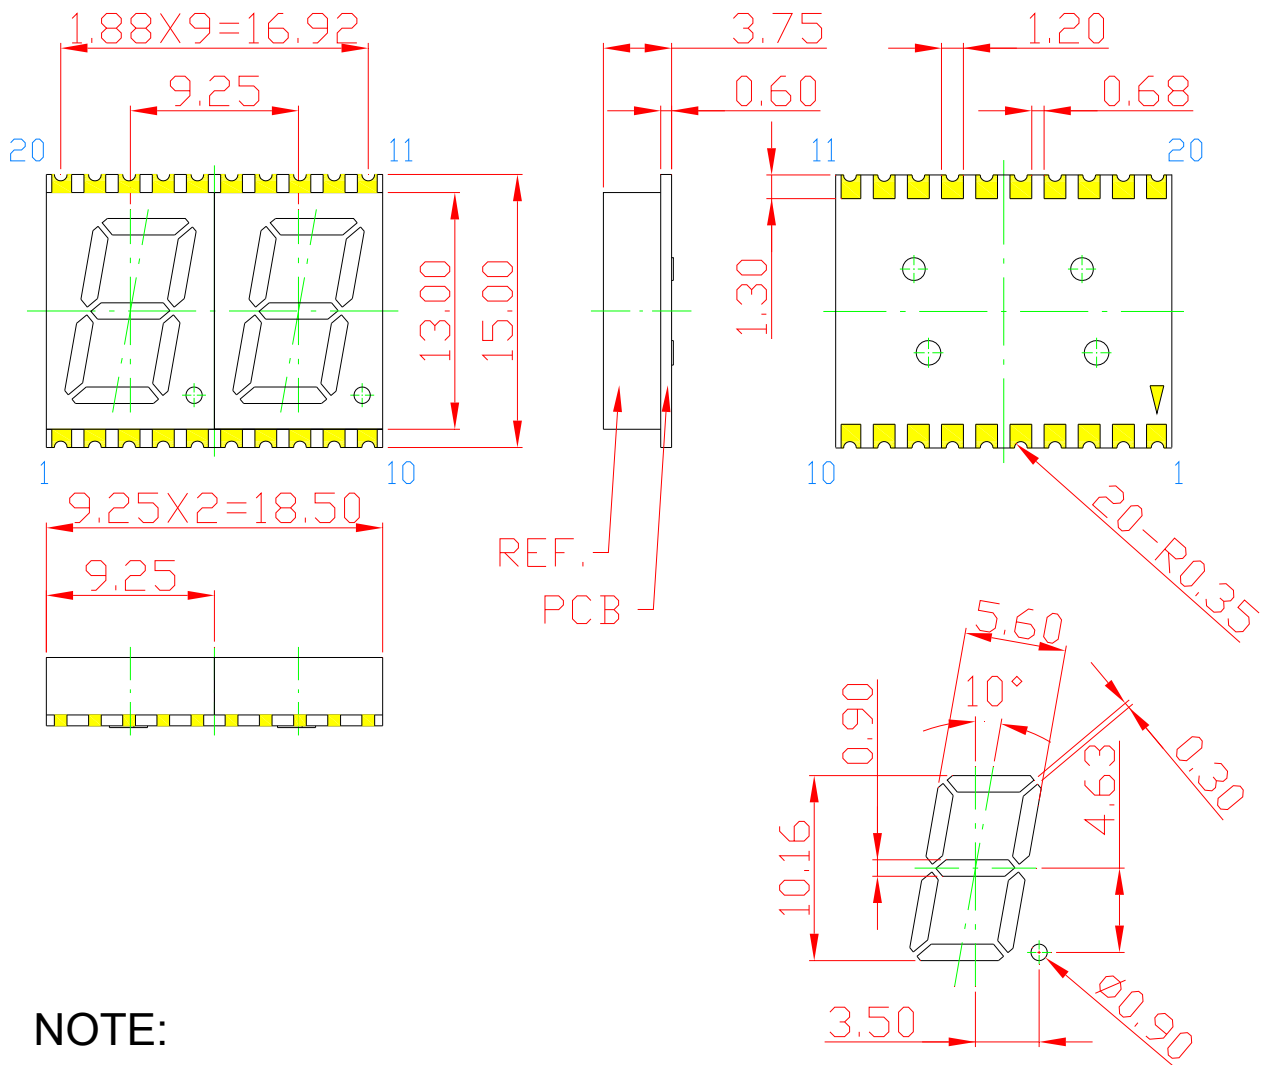

NOTE:
 Dimension in millimeters (inches),
 and tolerances are ± 0.25 mm (.01") specified.

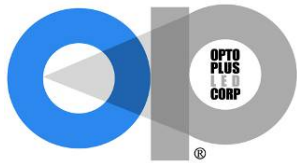




Opto Plus LED Corp.

0.4" SMD Type LED Display

OPS-D4013LA-GW

OPS-D4014LA-GW

● TYPICAL INTERNAL EQUIVALENT CIRCUIT

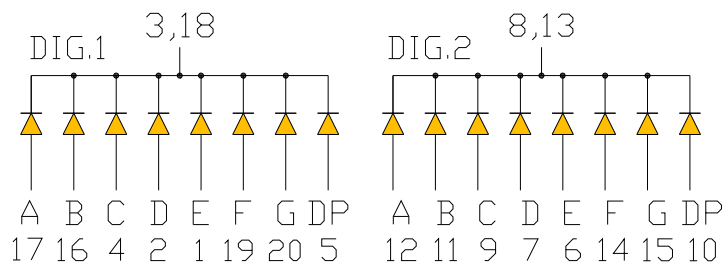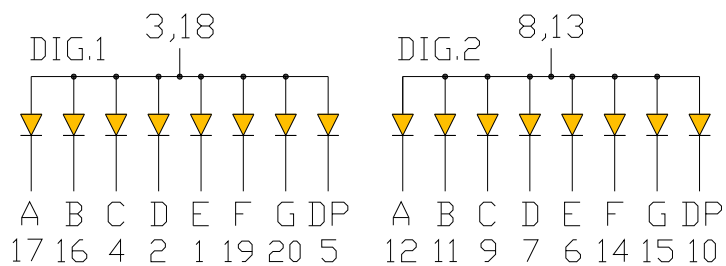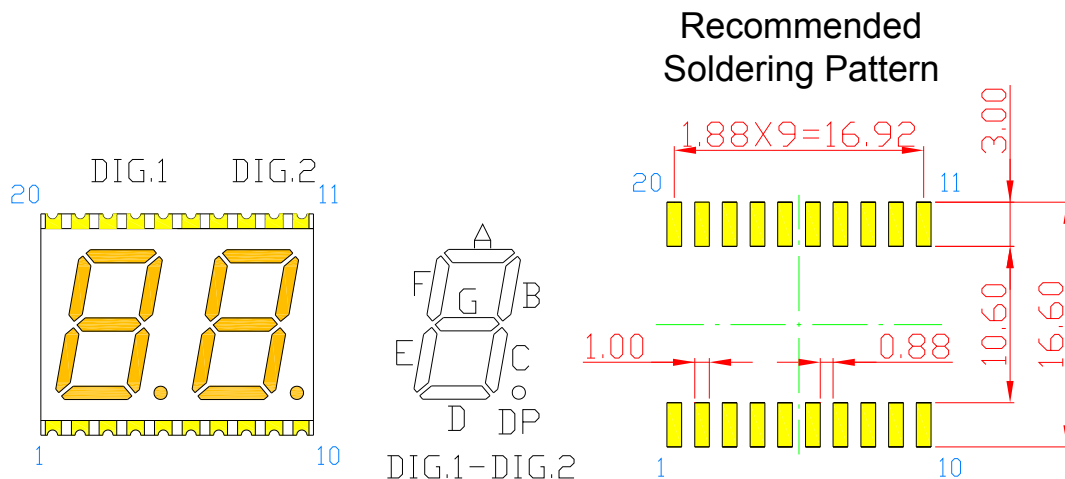



Opto Plus LED Corp.
0.4" SMD Type LED Display
OPS-D4013LA-GW
OPS-D4014LA-GW

● **LA: SUPER BRIGHT AMBER (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

| Parameter | Symbol | Maximum Rating | Unit |
|--------------------------------------|------------------|----------------|---------|
| Power dissipation | P _{AD} | 70 | mW |
| Derating liner from 25°C | - | 0.28 | mA / °C |
| Continuous forward current | I _{AF} | 25 | mA |
| Peak current (duty cycle 1/10, 1kHz) | I _{PF} | 90 | mA |
| Reverse voltage | V _R | 5 | V |
| Operating temperature | T _{OPR} | -40 to +105 | °C |
| Storage temperature | T _{STG} | -40 to +105 | °C |

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

| Characteristic | Symbol | Condition | Min. | Type. | Max. | Unit |
|------------------------------|----------------|----------------------|------|-------|------|------|
| Forward Voltage, (Per Dice) | V _F | I _F =20mA | - | 2.0 | 2.6 | V |
| Reverse Current, (Per Dice) | I _R | V _R =5V | - | - | 10 | μA |
| Peak Wavelength | λ _P | I _F =20mA | - | 612 | - | nm |
| Dominant Wavelength | λ _D | I _F =20mA | 604 | - | 614 | nm |
| Luminous Intensity | I _v | I _F =20mA | 12 | - | 60 | mcd |
| Spectral radiation bandwidth | Δλ | I _F =20mA | - | 20 | - | nm |



Opto Plus LED Corp.

0.4" SMD Type LED Display

OPS-D4013LA-GW

OPS-D4014LA-GW

● LA: SUPER BRIGHT AMBER (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

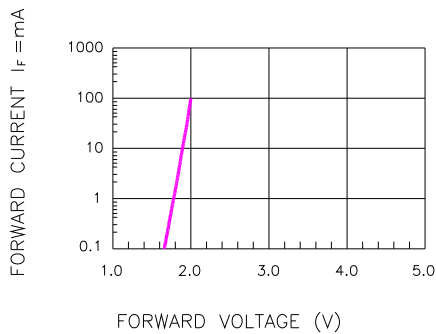


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

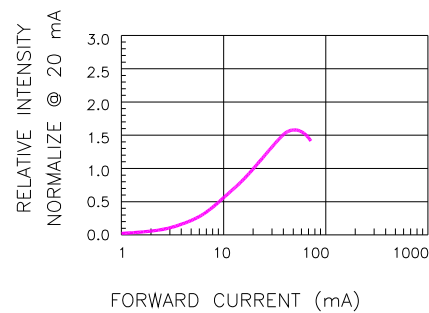


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

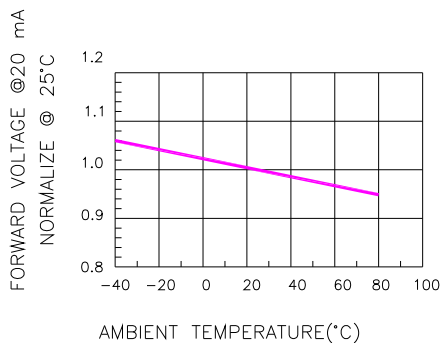


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

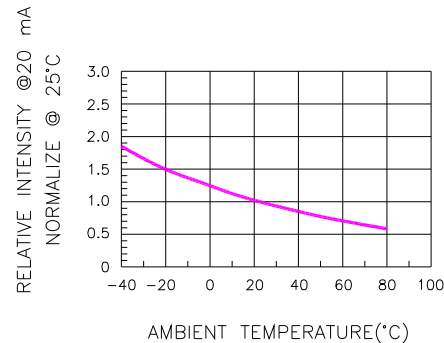


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

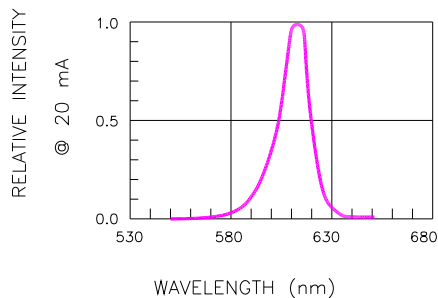


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

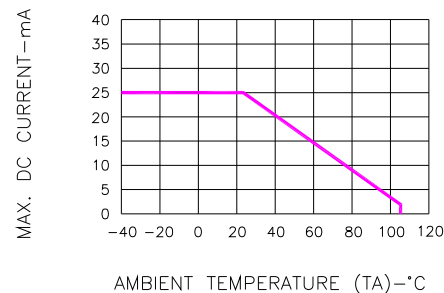


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

Version: A Date: 11/26/2015

Opto Plus LED Corp. 7F-3, No.496, Bannan Road, Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C)

Website: www.opled.com.tw E-mail: sales@opled.com.tw Tel: 886-2-2222-5698 Fax: 886-2-2222-2566




Opto Plus LED Corp.
0.4" SMD Type LED Display
OPS-D4013LA-GW
OPS-D4014LA-GW

● **SMT REFLOW SOLDERING INSTRUCTIONS**

SMT Soldering Profile

Pb free reflow soldering Profile

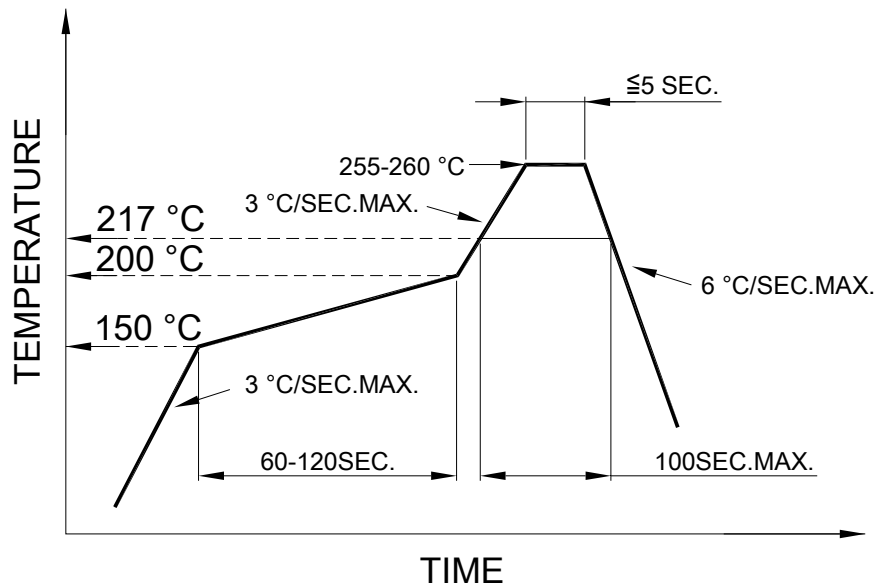

- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● **SOLDERING IRON**

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.