

# Opto Plus LED Corp.

## 0.8" SMD Type LED Display

### OPS-Q8010LB-GW

### OPS-Q8011LB-GW

#### ● FEATURES

- 0.8 inch (20.32 mm) Digit Height.
- SMD type.
- Low current operation.
- Gray face, White segment.
- RoHS compliant, Pb Free.

#### ● DESCRIPTION

The OPS-Q8010LB-GW & OPS-Q8011LB-GW are 0.8 inch (20.32mm) height Quadruple 7-segment displays.

This device utilizes Super Bright Blue LED chip which are made from InGaN On a transparent GaN, substrate.

The display has Gray face, White segment.

#### ● DEVICE

PART NO	DESCRIPTION
OPS-Q8010LB-GW	Common Anode
OPS-Q8011LB-GW	Common Cathode


**RoHS Compliance**



**Pb free.**





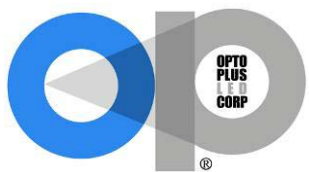



# Opto Plus LED Corp.

## 0.8" SMD Type LED Display


### OPS-Q8010LB-GW

### OPS-Q8011LB-GW


#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

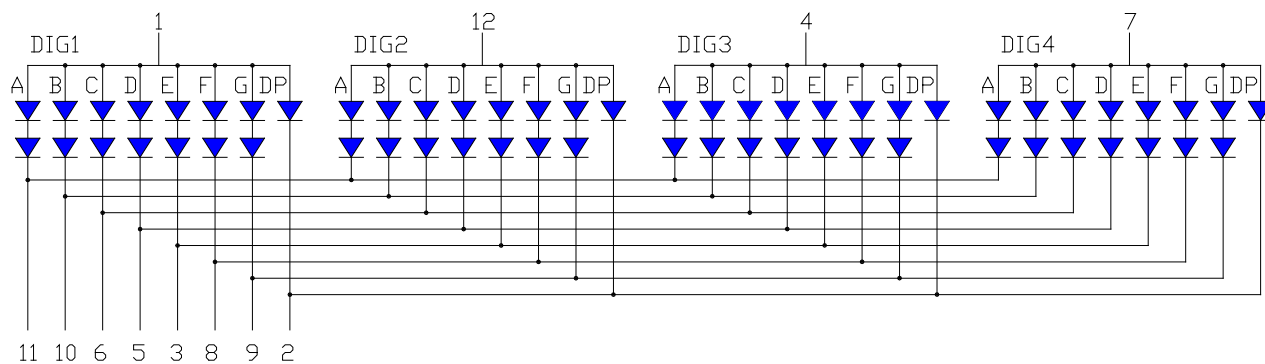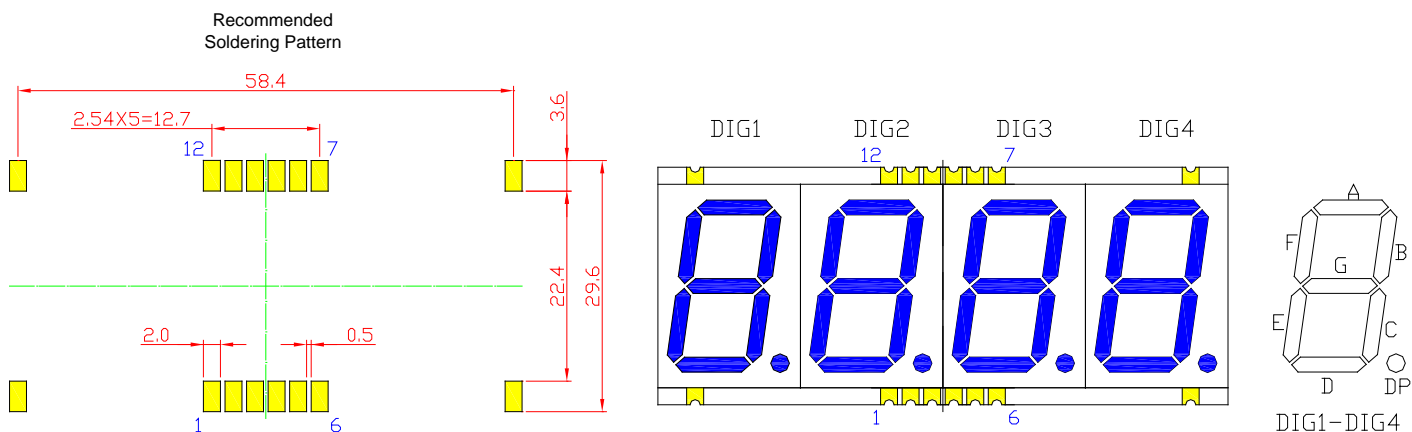

OPS-Q8010LB-GW (Common Anode)

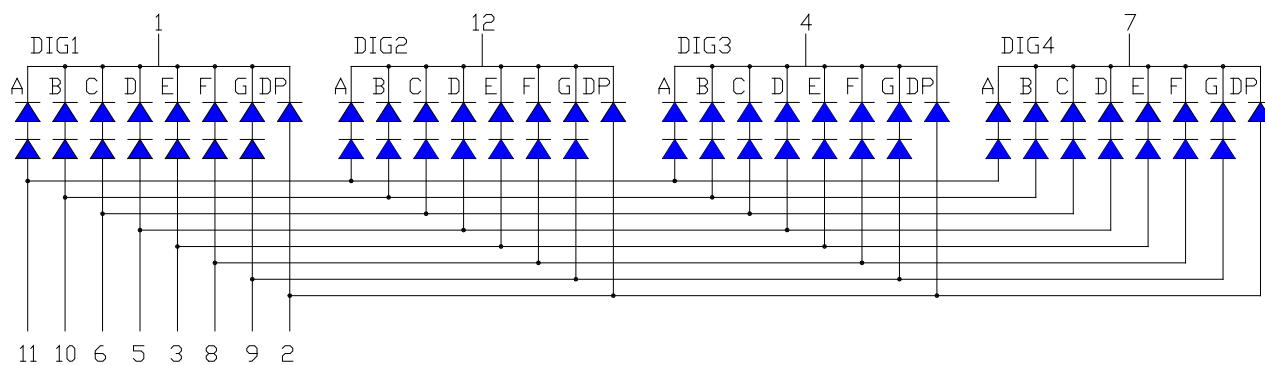

OPS-Q8011LB-GW (Common Cathode)

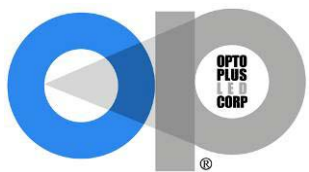

**Opto Plus LED Corp.**  
**0.8" SMD Type LED Display**  
**OPS-Q8010LB-GW**  
**OPS-Q8011LB-GW**


● **LB: SUPER BRIGHT BLUE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT  $T_a=25^{\circ}\text{C}$

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	$P_{AD}$	120	mW
Derating liner from $25^{\circ}\text{C}$	-	0.3	mA / $^{\circ}\text{C}$
Continuous forward current	$I_{AF}$	30	mA
Peak current (duty cycle 1/10, 1kHz)	$I_{PF}$	100	mA
Reverse voltage	$V_R$	5	V
Operating temperature	$T_{OPR}$	-40 to +105	$^{\circ}\text{C}$
Storage temperature	$T_{STG}$	-40 to +105	$^{\circ}\text{C}$

ELECTRICAL - OPTICAL CHARACTERISTICS AT  $T_a=25^{\circ}\text{C}$

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	$V_F$	$I_F=20\text{mA}$	-	3.2	4.0	V
Reverse Current, (Per Dice)	$I_R$	$V_R=8\text{V}$	-	-	10	$\mu\text{A}$
Dominant Wavelength	$\lambda_D$	$I_F=20\text{mA}$	-	470	-	nm
Luminous Intensity	$I_V$	$I_F=20\text{mA}$	-	50	-	mcd
Spectral radiation bandwidth	$\Delta\lambda$	$I_F=20\text{mA}$	-	30	-	nm

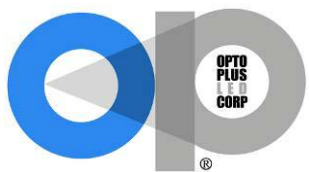

# Opto Plus LED Corp.

## 0.8" SMD Type LED Display

### OPS-Q8010LB-GW

### OPS-Q8011LB-GW

#### ● LB: SUPER BRIGHT BLUE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

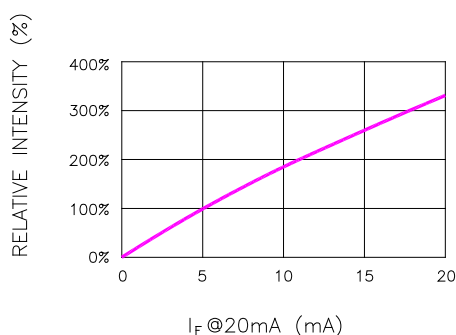


Fig.1 RELATIVE INTENSITY VS. FORWARD CURRENT

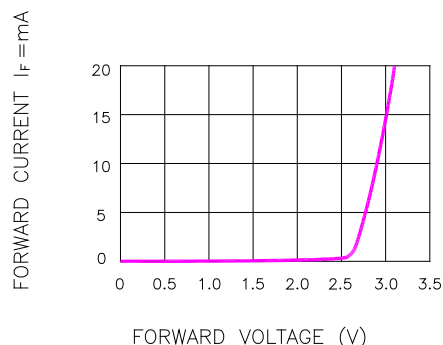


Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

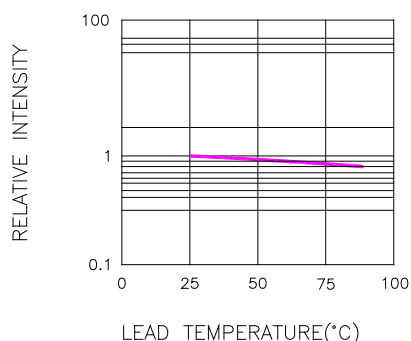


Fig.3 RELATIVE INTENSITY VS. LEAD TEMPERATURE  
(PULSED 20 mA; 300us PULSE, 10ms PERIOD)

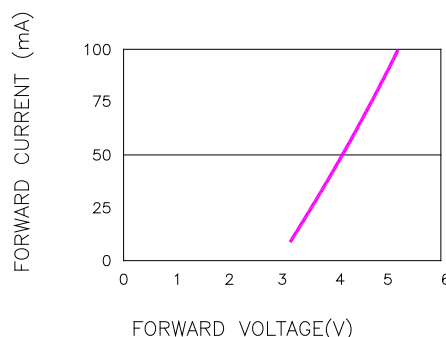


Fig.4 PEAK FORWARD VOLTAGE VS. FORWARD CURRENT  
(100us TEST PULSE, 1% DUTY CYCLE)

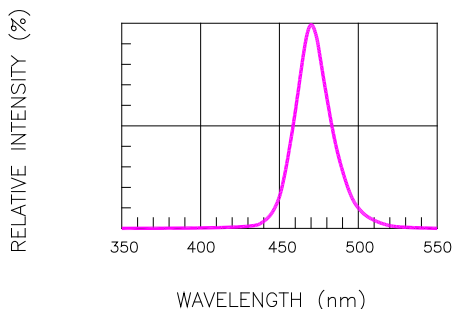


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH


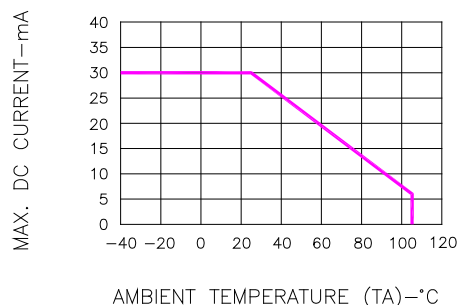


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

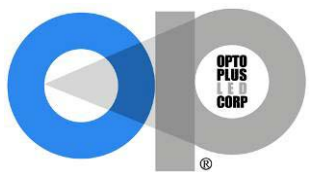

# Opto Plus LED Corp.

## 0.8" SMD Type LED Display


### OPS-Q8010LB-GW

### OPS-Q8011LB-GW

#### ● RECOMMEND SOLDERING PROFILE

SMT Soldering Profile

Pb free reflow soldering Profile

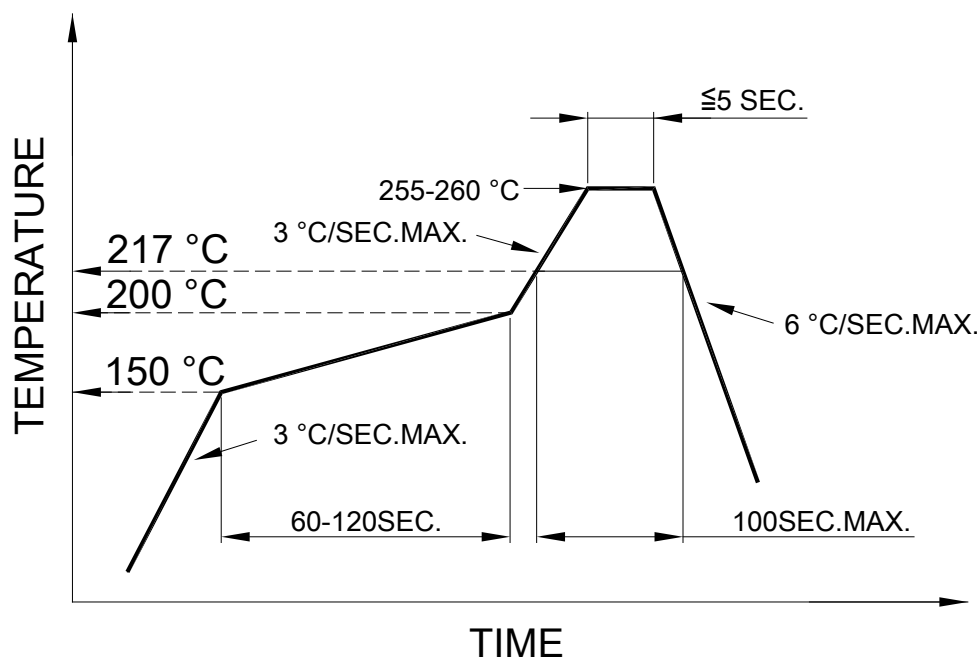

#### ● SOLDERING IRON

Basic specification :  $\leq 4$  seconds when 260°C, If temperature is higher, time should be shorter (+10°C→1 sec). Power dissipation of iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

#### ● REWORK

Customer must finish rework within  $\leq 3$  sec under 350°C.